


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 35 TOWNSHIP 17 RANGE 4
DATE: -7-12-99- 1-04-05
PARTY CHIEF: -Kiste- Wilcoxon
CREW: _____
TYPE OF MARKER: Harrison
METHOD OF ESTABLISHMENT: County: 7-23-86

IN. S.P.C. E ZONE, NAD 83
NAME: 17043504
N: 513840.3900(m)
E: 67140.8110(m)

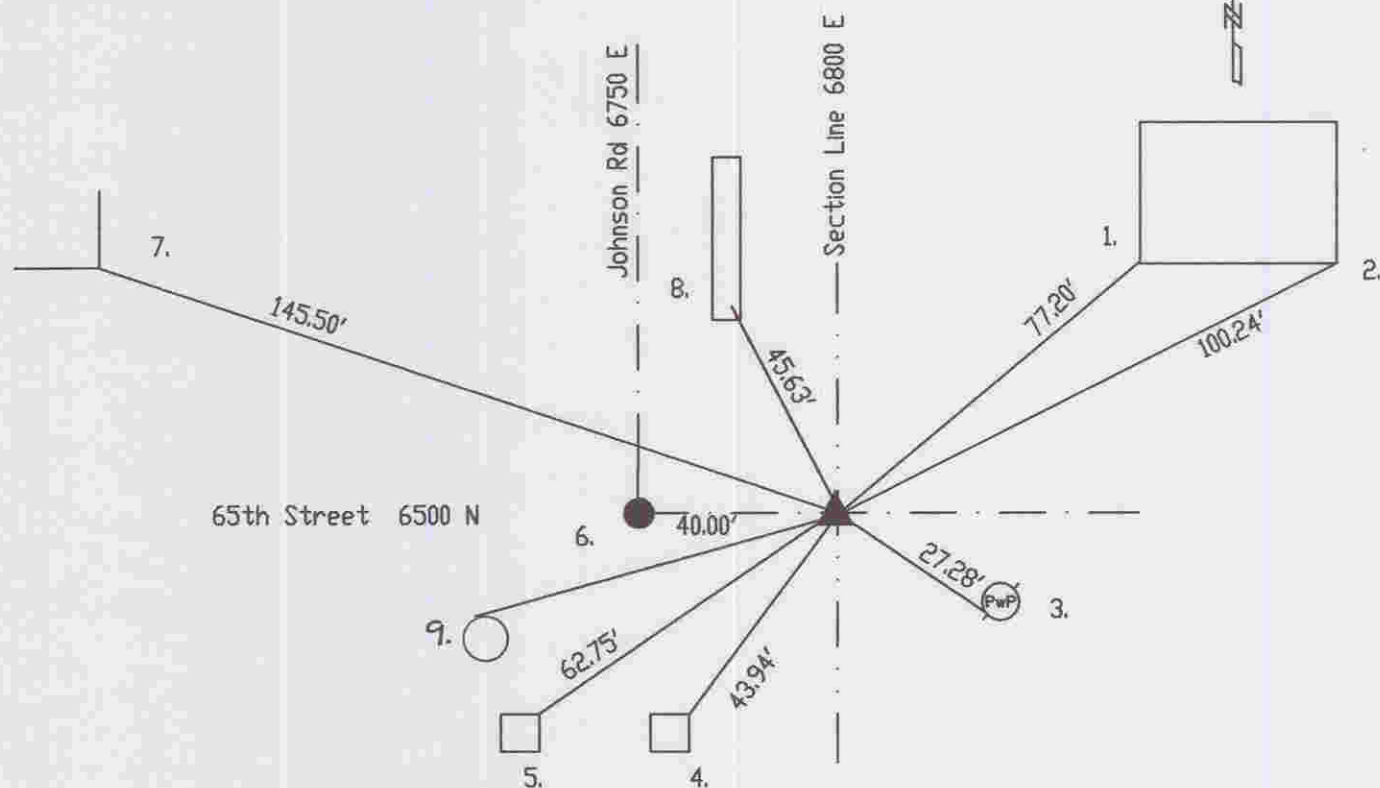

Original post set 1821 by Wm. B. Laughlin with witnesses: 4" beech N 38 W 7 links, 14" ash S 9 E 10 links per Marion County Atlas pg. 12. Survey by Charles T. Culley 5-16&20-1899 called stone set per Lawrence Township Legal Survey Book pg. 32. Reference 1-6-55 East Quarter corner Sec. 34-17-4 called for hub over stone 12" down. Back up ties 8-20-74 called for railroad spike. Excavated 7-23-86 and stone found 36" down. Harrison set. Re-tied 7-12-99 by Kiste.

HC743504

REF.	DISTANCE	DESCRIPTION
1.	77.20'	SW corner of garage
2.	100.24'	SE corner of garage
3.	27.28'	Nail in bottle cap SW PwP367-317
4.	43.94'	NE corner of 3'x3' brick post
5.	62.75'	NE corner of 3'x3' brick post
6.	40.00'	Due W to C/L of Johnson Rd 6750 E
7.	145.50'	SE corner of garage
8.	45.63'	Cut 'x' in E side of sidewalk
9.	65.40'	PK nail W PwP#66-317 12"up